




**DIN 9825 ISO 9182-2**

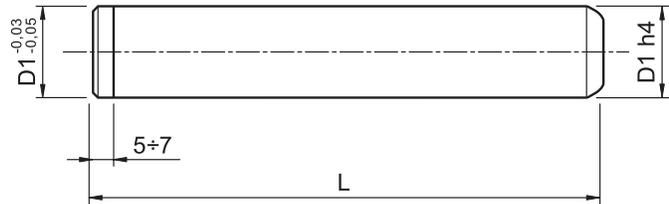

Materiale Material	Durezza Hardness	Trattamento Heat treatment
<b>1.7131</b>	<b>61 - 63 HRC</b>	<b>CMT + TMP Case Hardened</b>

**Esempi di ordinazione / How to order:**

CODICE / CODE	D1	L
<b>7040</b>	<b>18</b>	<b>120</b>

L	D1													
	18	19	20	24-25	30-32	38	40	42	48	50	52	60	63	80
110		•	•											
112		•	•											
120	•	•												
125		•	•	•	•									
130	•	•												
140	•	•	•	•	•									
150	•	•		•	•									
160	•	•	•	•	•	•	•							
170	•	•		•	•		•	•						
180	•	•	•	•	•	•	•	•		•	•			
190	•	•		•	•		•	•		•	•			
200	•	•	•	•	•	•	•	•	•	•	•		•	
210				•	•		•	•		•	•			
220				•	•		•	•		•	•		•	
224		•	•	•	•	•	•		•	•				
230				•	•		•	•		•	•			
240				•	•		•	•		•	•		•	
250		•	•	•	•	•	•	•	•	•	•	•	•	
260				•	•		•	•		•	•		•	
270				•	•	•	•	•		•	•			
280				•	•		•	•	•	•	•	•	•	•
300				•	•		•	•		•	•		•	•
315				•	•	•	•		•	•		•	•	•
320							•	•		•	•		•	•
350							•	•		•	•			
355				•	•	•	•		•	•		•	•	•
360													•	•
400				•	•	•	•	•		•	•	•	•	•
450				•	•	•	•		•	•		•	•	•
500				•	•	•	•		•	•		•	•	•
600														•
700														•
800														•