





ISO 9448-6

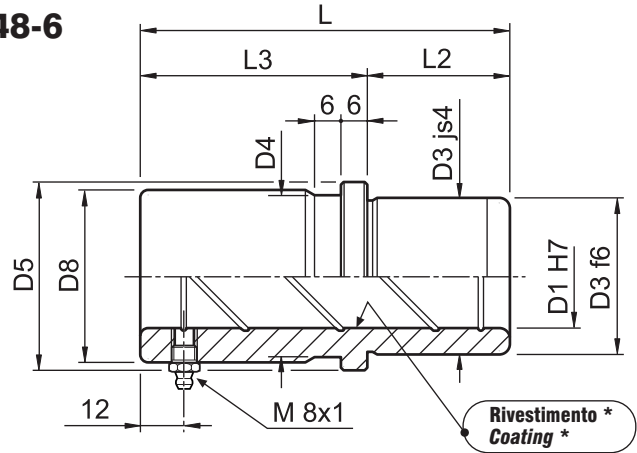

Materiale Material	Durezza Hardness	Trattamento Heat treatment
1.7131	61 - 63 HRC	CMT + TMP Case Hardened

Esempi di ordinazione / How to order:		
CODICE / CODE	D1	L
7464/4	19	43

Cod. 7464/1								
D1	D3	D4	D5	D8	R	L	L2	L3
19	32	32	40	39	26	59	23	36
20	32	32	40	39	26	59	23	36
24	40	40	48	46	30	79	23	56
25	40	40	48	46	30	79	23	56
30	48	48	56	53	33,5	93	30	63
32	48	48	56	53	33,5	93	30	63
38	58	58	66	63	38,5	108	37	71
40	58	58	66	63	38,5	108	37	71
48	70	70	80	77	45,5	127	47	80
50	70	70	80	77	45,5	127	47	80
60	85	85	95	92	53	150	60	90
63	85	85	95	92	53	150	60	90

Cod. 7464/4								
D1	D3	D4	D5	D8	R	L	L2	L3
19	32	32	40	39	26	43	23	20
20	32	32	40	39	26	43	23	20
24	40	40	48	46	30	59	23	36
25	40	40	48	46	30	59	23	36
30	48	48	56	53	33,5	75	30	45
32	48	48	56	53	33,5	75	30	45
38	58	58	66	63	38,5	82	37	45
40	58	58	66	63	38,5	82	37	45
48	70	70	80	77	45,5	97	47	50
50	70	70	80	77	45,5	97	47	50
60	85	85	95	92	53	116	60	56
63	85	85	95	92	53	116	60	56

*** Rivestimento**

Mediante un trattamento meccanico si creano superficialmente delle microporosità che vengono riempite da polimeri fluorocarbonici. Grazie a questo processo, l'usura superficiale dei polimeri non preclude le caratteristiche del trattamento. Buone proprietà antigrippanti, basso coefficiente di attrito (0,06) sono sviluppate grazie alla combinazione fluoropolimeri-grafite.

*** Coating**

By a mechanical treatment, superficially some micropores are forming. This microporosity is filled with fluorocarbon polymers. Thanks to this process, the surface wear of polymers does not change characteristics of treatment. Good anti-seized properties and low friction coefficient (0,06) are developed through the combination of fluoropolymers and graphite.