




(STD. EU)

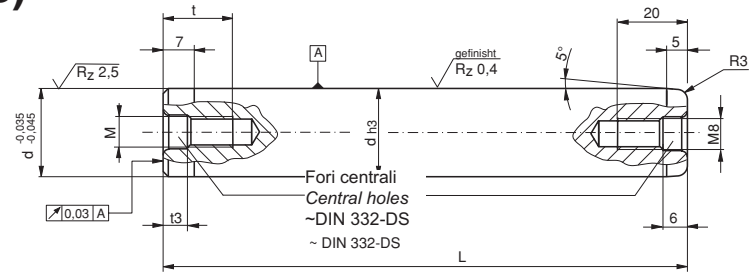

Materiale: 1.1213/63±2HRC - Durezza: ~DIN 9825-2/ISO 9182
Material: 1.1213/63±2HRC - Hardness: ~DIN 9825-2/ISO 9182

Se $d_1 \geq 63$ mm - contrarre colonna
If $d_1 \geq 63$ mm - please contract pillar

d	L	M	t3	t
19-20	100	8	6	6
	110			
	120			
	130			
	140			
	150			
	160			
	170			
	180			
	190			
	200			
	220			
	240			
	250			
	260			
24-25	280			
	300			
	360			
	400			
	100			
	110			
	120			
	125			
	130			
	140			
	150			
	160			
	170			
	180			
	190			
	200			
	210			
	220			
	230			
	240			
	250			
	260			
	280			
	300			
	320			
	360			
	400			
	450			

d	L	M	t3	t
30-32	120	10	7,5	25
	130			
	140			
	150			
	160			
	170			
	180			
	190			
	200			
	210			
	220			
	240			
	250			
	260			
	280			
38-40	300			
	320			
	340			
	360			
	380			
	400			
	450			
	500			
	140			
	150			
	160			
	170			
	180			
	190			
	200			
	210			
	220			
	230			
	240			
	250			
	260			
	270			
	280			
	300			
	320			
	340			
	360			
	380			
	400			
	450			
	500			

d	L	M	t3	t
48-50	170	12	9,5	28
	180			
	190			
	200			
	210			
	220			
	240			
	250			
	260			
	280			
	300			
	320			
	340			
	360			
	380			
60-63	400			
	450			
	500			
	180			
	200			
	220			
	240			
	250			
	260			
	280			
	300			
	320			
	360			
	380			
	400			
80	450			
	500			
	200			
	220			
	240			
	260			
	280			
	300			
	320			
	360			
	380			
	400			
	450			
	500			
	16			