




GOLFARI UNIVERSALI CON CENTRAGGIO

DOUBLE SWIVEL SHACKLE WITH CENTERING

Cod.
DSS-C

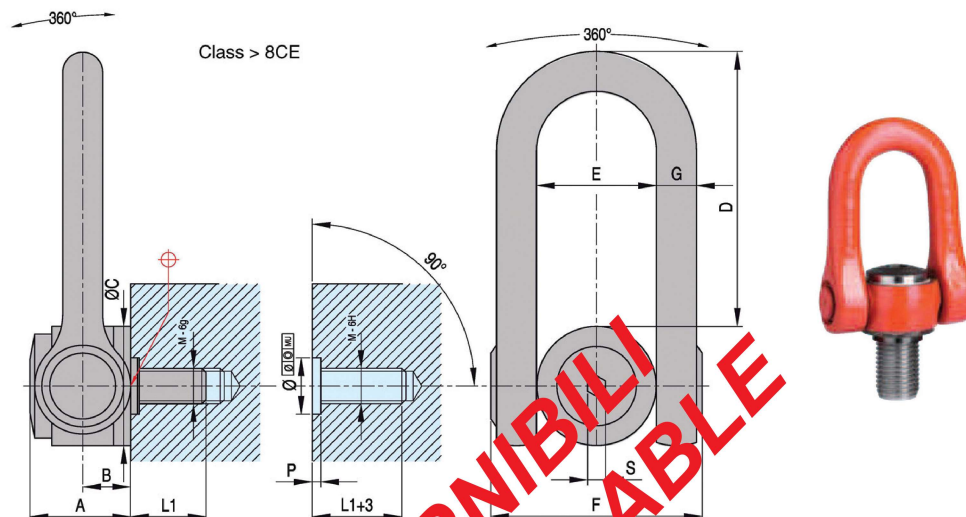

Esempio di ordinativo: codice
Example of purchasing order: code

Codice	P	SF	KT	M/ø	TL	N°	S	A	B	C	D	E	F	G	P
DSS C M 33*	8000	5	14	48+0,10/+0,30	23	50	19	61	31	70	104	73	145	29	6+0,5/+1
DSS C M36	10000	5	18	48+0,10/+0,30	320	54	19	61	31	70	104	73	145	29	6+0,5/+1
DSS C M36x3*	10000	5	18	48+0,10/+0,30	320	54	19	61	31	70	104	73	145	29	6+0,5/+1
DSS C M39*	10000	5	18	48+0,10/+0,30	320	54	19	61	31	70	104	73	145	29	6+0,5/+1
DSS C M42	12500	5	20	48+0,10/+0,30	400	63	19	61	31	70	104	73	145	29	6+0,5/+1
DSS C M42x3*	12500	5	20	48+0,10/+0,30	400	63	19	61	31	70	104	73	145	29	6+0,5/+1
DSS C M45*	15000	4	23	64+0,10/+0,30	600	63	19	61	31	70	104	73	145	29	6+0,5/+1
DSS C M48	20000	4	26	64+0,60/+0,30	600	68	19	79	38	90	125	91	184	33	8+0,5/+1
DSS C M48x3*	20000	4	26	64+0,60/+0,30	600	68	19	79	38	90	125	91	184	33	8+0,5/+1
DSS C M48x4*	20000	4	26	64+0,60/+0,30	600	68	19	79	38	90	125	91	184	33	8+0,5/+1
DSS C M52*	20000	4	26	64+0,60/+0,30	600	68	19	79	38	90	125	91	184	33	8+0,5/+1
DSS C M56	25000	4	28	64+0,60/+0,30	600	78	19	79	38	90	125	91	184	33	8+0,5/+1
DSS C M56x4*	25000	4	28	64+0,60/+0,30	600	78	19	79	38	90	125	91	184	33	8+0,5/+1
DSS C M64	32000	4	36	74+0,60/0,10	600	90	19	79	38	95	125	91	184	33	10+0,5/+1
DSS C M64x4*	32000	4	36	74+0,60/0,10	600	90	19	79	38	95	125	91	184	33	10+0,5/+1

* Non standard

Art. DME

P= massimo carico in Newton / max load in Newton

SF= fattore di sicurezza / safety factor

KT= N° di classificazione / chain classification number

TL= coppia di serraggio consigliata in Newton / recommended tightening torque in NewtonMetre

ACCESSORI
ACCESSORIES