




**Project**  
INTERNATIONAL

CODICE\CODE **N**


# CONNETTORI CONNECTORS

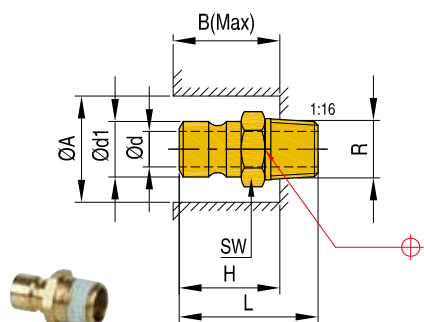

**Connettori con guarnizione in PTFE - Connector plugs with teflon seal** Mat.: Ottone-Brass

| Cod.               | R         | d1   | d  | L    | A  | B  | H  | SW | Series |
|--------------------|-----------|------|----|------|----|----|----|----|--------|
| <b>N 6-1/8" A</b>  | 1/8" BSPT | 9,4  | 6  | 24,0 | 22 | 18 | 17 | 13 | N6     |
| <b>N 6-MA</b>      | M10x1     | 9,4  | 6  | 23,0 | 22 | 18 | 17 | 13 | N6     |
| <b>N 6-1/4" A</b>  | 1/4" BSPT | 9,4  | 6  | 29,0 | 26 | 20 | 19 | 16 | N6     |
| <b>N 6-3/8" A</b>  | 3/8" BSPT | 9,4  | 6  | 30,0 | 30 | 22 | 21 | 19 | N6     |
| <b>N 9-1/8" A</b>  | 1/8" BSPT | 13,5 | 9  | 30,0 | 26 | 26 | 25 | 14 | N9     |
| <b>N 9-1/4" A</b>  | 1/4" BSPT | 13,5 | 9  | 34,0 | 26 | 26 | 25 | 16 | N9     |
| <b>N 9-3/8" A</b>  | 3/8" BSPT | 13,5 | 9  | 34,0 | 30 | 28 | 26 | 19 | N9     |
| <b>N 9-MA</b>      | M10x1     | 13,5 | 6  | 29,5 | 26 | 26 | 25 | 16 | N9     |
| <b>N 9-1/2" A</b>  | 1/2" BSPT | 13,5 | 9  | 39,0 | 37 | 28 | 26 | 24 | N9     |
| <b>N 16-1/2" A</b> | 1/2" BSPT | 19,9 | 16 | 44,0 | 32 | 38 | 37 | 22 | N16    |
| <b>N 16-3/4" A</b> | 3/4" BSPT | 19,9 | 16 | 45,0 | 38 | 40 | 38 | 29 | N16    |


CODICE\CODE **N**

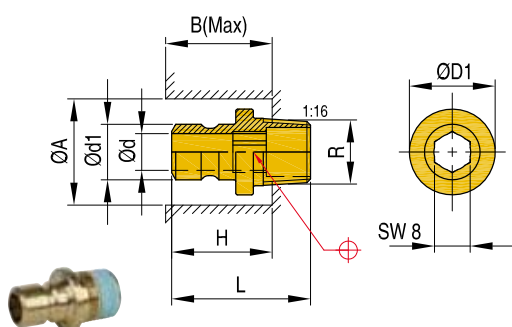

**Connettori con esagono interno - Connector plug with inner hexagon** Mat.: Ottone-Brass

| Cod.               | R         | d1   | d | L  | D1 | A  | B  | H  | Series |
|--------------------|-----------|------|---|----|----|----|----|----|--------|
| <b>N 9-3/8" AH</b> | 3/8" BSPT | 13,5 | 9 | 34 | 21 | 30 | 28 | 26 | N9     |

CODICE\CODE **N**

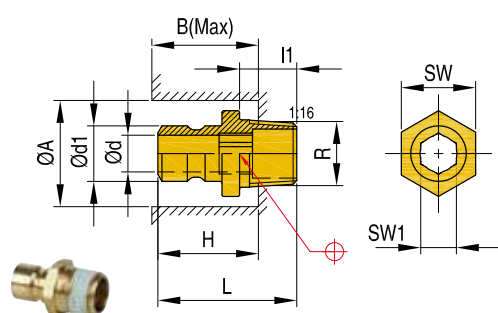


**Connettori con esagono interno - Connector plug with inner hexagon** Mat.: Ottone-Brass

| Cod.                  | R         | d   | d1   | L  | I1 | A  | B  | H  | SW | SW1 | Series |
|-----------------------|-----------|-----|------|----|----|----|----|----|----|-----|--------|
| <b>N6 1/8 AHN</b>     | 1/8" BSPT | 6   | 9,4  | 23 | 9  | 22 | 16 | 14 | 11 | 5   | N6     |
| <b>N6 M10x1 AHN</b>   | M10x1     | 6   | 9,4  | 23 | 9  | 22 | 16 | 14 | 11 | 5   | N6     |
| <b>N6 1/4 AHN</b>     | 1/4" BSPT | 6   | 9,4  | 28 | 14 | 26 | 16 | 14 | 16 | 5   | N6     |
| <b>N6 M14x1,5 AHN</b> | M14x1,5   | 6   | 9,4  | 28 | 14 | 26 | 16 | 14 | 16 | 5   | N6     |
| <b>N9 1/4 AHN</b>     | 1/4" BSPT | 9,3 | 13,5 | 34 | 14 | 26 | 22 | 20 | 16 | 8   | N9     |
| <b>N9 M14x1,5 AHN</b> | M14x1,5   | 9,3 | 13,5 | 34 | 14 | 26 | 22 | 20 | 16 | 8   | N9     |
| <b>N9 M16x1,5 AHN</b> | M16x1,5   | 9,3 | 13,5 | 35 | 14 | 30 | 23 | 21 | 19 | 8   | N9     |
| <b>N9 3/8 AHN</b>     | 3/8" BSPT | 9,3 | 13,5 | 35 | 14 | 30 | 23 | 21 | 19 | 8   | N9     |

- i connettori con esagono int. Jiffy consentono una facile installazione anche in punti in cui vi è spazio limitato per lavorare con una chiave inglese
- gamma completa fornita con sigillante per filetti
- the Jiffy inner hexagon connector plugs enable easy mounting where space is limited when working with a wrench
- complete range supplied with thread sealant

CODICE\CODE **FN**

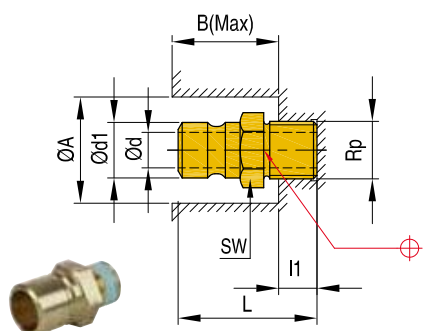

**Connettori per FSK e FSVK - Connector plugs for FSK and FSVK** Mat.: Ottone-Brass

| Cod.               | Rp       | A  | B    | d1   | d  | L  | I1   | SW | Series |
|--------------------|----------|----|------|------|----|----|------|----|--------|
| <b>FN 9-14 A</b>   | 1/4" BSP | 30 | 23,5 | 13,5 | 9  | 34 | 11,5 | 16 | N9     |
| <b>FN 9-38 A</b>   | 3/8" BSP | 30 | 23,5 | 13,5 | 9  | 34 | 11,5 | 19 | N9     |
| <b>FN 16-38 A</b>  | 3/8" BSP | 32 | 29,5 | 19,9 | 15 | 40 | 11,5 | 22 | N16    |
| <b>FN 16-38 AL</b> | 3/8" BSP | 32 | 29,5 | 19,9 | 15 | 53 | 24,5 | 22 | N16    |
| <b>FN 16-12 A</b>  | 1/2" BSP | 32 | 29,5 | 19,9 | 15 | 45 | 16,5 | 22 | N16    |
| <b>FN 16-12 AL</b> | 1/2" BSP | 32 | 29,5 | 19,9 | 15 | 54 | 25,5 | 22 | N16    |

"ART DME"

Tutti i connettori maschi (compresi i connettori della serie PCS) e di estensione sono forniti con il sigillante per filetti Jiffy-seal™. Ciò elimina inizialmente la necessità di ricorrere a un nastro o un composto sigillante.  
All Male plugs (including PCS-Series) and extension plugs are now supplied with Jiffy-seal™ thread sealant. Eliminating the initial need for joint tape or compound.

Ød1 reference point

RAFFREDDAMENTI  
MOLD COOLING