


BUSSOLE DI INIEZIONE SPRUE BUSHES

Codice:
7N32

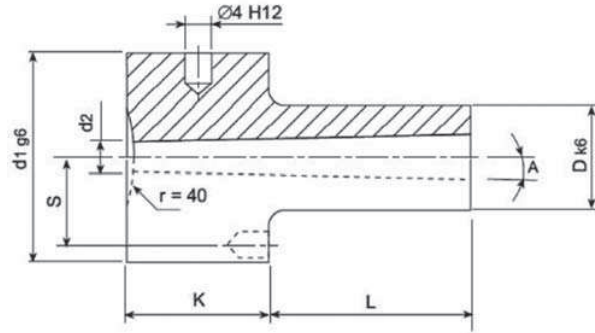


Materiale: 1.2826 Durezza: 54 HRC
Material: 1.2826 Hardness: 54 HRC

Esempio di ordinativo: 7N32xDxLxd2xA
Example of purchasing order: 7N32xDxLxd2xA

D	d2	A	S +0.02 -0.02	K +0.15 +0.05	d1	L +0.5 -0.2										
						22	27	36	46	56	66	76	86	96	116	136
12	2,5	0,5°	11	13	28		•	•	•	•	•	•				
12	3,5	0,5°	11	13	28		•	•	•	•	•	•				
18	3	0,5°	15	18	38				•	•	•	•	•	•	•	
18	4	0,5°	15	18	38				•	•	•	•	•	•	•	
12	2,5	1°	11	13	28	•	•	•	•	•						
12	3	1°	11	13	28	•	•	•	•	•						
12	3,5	1°	11	13	28	•	•	•	•	•						
18	3	1°	15	18	38		•	•	•	•	•	•	•	•	•	
18	4	1°	15	18	38		•	•	•	•	•	•	•	•	•	
24	5	1°	20	23	48				•	•	•	•	•	•	•	•
18	3,5	1,5°	15	18	38		•	•	•	•						
18	4,5	1,5°	15	18	38		•	•	•	•		•				
24	4,5	1,5°	20	23	48				•	•						
24	6,5	1,5°	20	23	48					•		•				

BUSSOLA TIRACOLATA RETAINER BUSH

Codice:
7N40

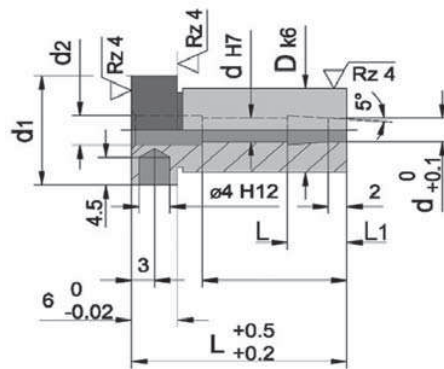

Materiale: 1.2826 Durezza: 54 HRC
Material: 1.2826 Hardness: 54 HRC

Esempio di ordinativo: N740xDxL
Example of purchasing order: N740xDxL

D	d	d1	d2	l	l1	L +0.5 -0.2									
						22	27	36	46	56	66	76	86	96	
12	4	16	4,5	18	7	•	•	•	•	•	•	•			
18	6	22	6,5	22	7	•	•	•	•	•	•	•			
24	8	28	8,5	28	9,5	•		•	•		•	•	•	•	